DIN Rail terminal blocks ／ DK..-PE series

DK50-PE

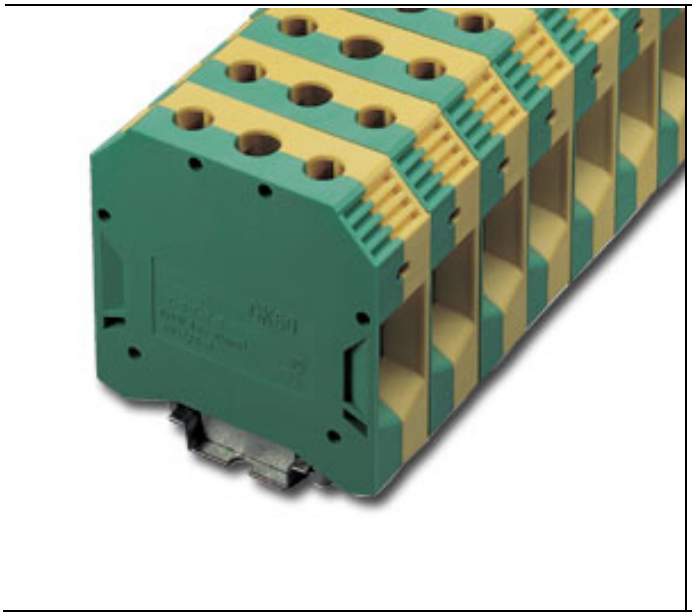

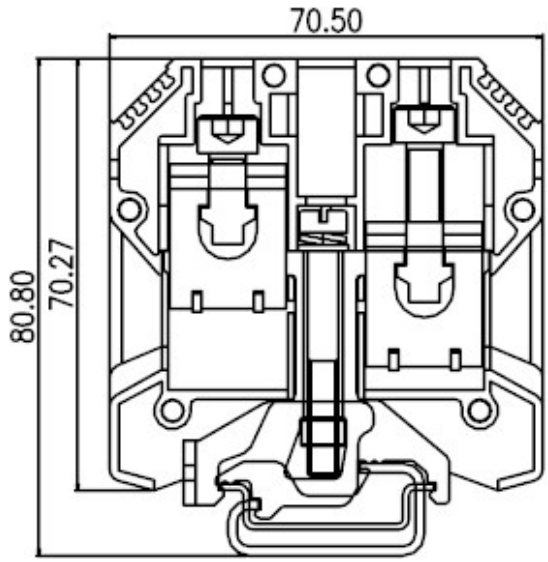

Approval		
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current		150A
Conductor cross-section, solid (AWG / mm^2)	6~1/0 / 16~50	
Conductor cross-section, flexible (AWG / mm^2)	6~1/0 / 16~50	
Rated impulse withstand voltage	8KV	
Torque (N-m)	7.9	
Screw	M6	
Wire strip length	20~25mm	
Insulating material	PA	
TxHxW (mm)	20 x 70.27 x 70.5	

Optional color	Cat. No.
●	
●	
●	
●	

Copyright .DINKLE ENTERPRISE CO., LTD. All Right Reserved.

	Accessories	Cat. No.
End cover		
Partition		
Small partition		
Insertion bridge	2 way 3 way 4 way 10 way	
Insertion bridge	2 way 3 way 4 way 10 way	
Screw-on bridge	2 way 3 way 4 way 10 way	
Marking label		TM28
Mounting Rail		TS-35 / TS-32
Tool		

TEL: +886-2-2908-0614 **FAX:** +886-2-2908-8549 **E-mail:** infor@dinkle.com.tw

Copyright .DINKLE ENTERPRISE CO., LTD. All Right Reserved.