

Polycarbonate Enclosure for DC Isolator Switch 2 Pole

Please read all notes before commencing work. It is assumed throughout that personnel working on the switch are electrically competent. The switch should be installed, commissioned and maintained by competent personnel in accordance with current electrical codes of practice, the current IEE regulations (BS7671), statutory requirements and any specific instructions issued by the company.

The switch can be used to distribute: 2 supplies to 1 load or 1 supply to feed 1 of 2 loads i.e. duty / standby.

The switch complies with EN60947-3, Classified as a switch – disconnecter.



For detailed ratings refer to label on switch body. Ingress protection - IP65.

The appropriately rated glands must be used to maintain the IP integrity of the enclosure.

Part No ISDC225

DC-21B

19A	690VDC
23A	600VDC
25A	510VDC

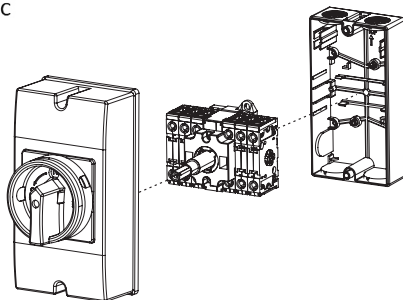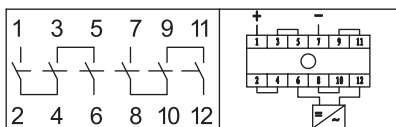

Item	Size W x H x D(mm)	Cable entry	Max cable size(mm ²)
ISDC225	160 x 85 x 113	2xM20/4xM25	6



Switchtec Ltd

Brooms Road
Stone Business Park
Stone
Staffordshire ST15 0SH

01785 818600
01785 811900
sales@switchtec.co.uk
www.switchtec.co.uk