
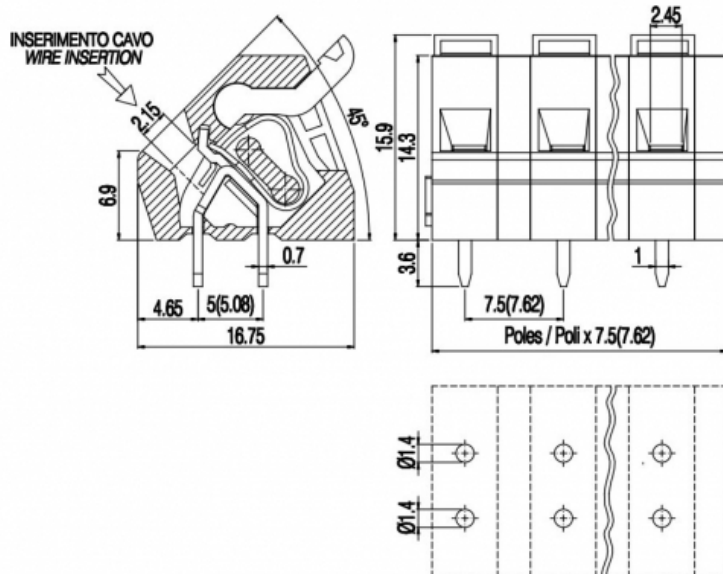


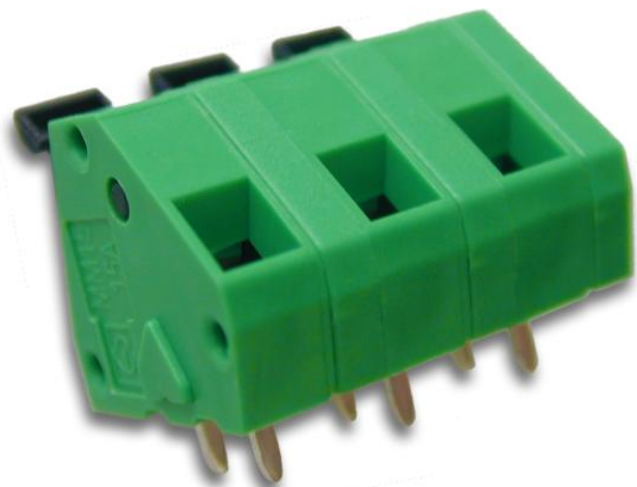

Screwless terminal block - 45° angled - with button - Modular version - Pitch 7,62mm

GENERAL INFORMATION

pitch:	7,62 mm
housing height:	14,30 mm
housing depth:	16.75 mm
dimensional class:	slow
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	2.45 × 2.45 mm
wire stripping:	max 9 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	450V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

spring releasing:	0.6 x 3.5mm
-	-

APPROVALS DATA



	-	-	UL 1059
current:	-	-	17A factory / 17A field
voltage:	-	-	300V
wire section:	-	-	12÷30AWG
torque:	-	-	-
FILE:	-	-	E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a
clamp/spring:	
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS



other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
02	MG102-7,62-P	N/A	N/A	N/A
03	MG103-7,62-P	N/A	N/A	N/A
04	MG104-7,62-P	N/A	N/A	N/A
05	MG105-7,62-P	N/A	N/A	N/A
06	MG106-7,62-P	N/A	N/A	N/A
07	MG107-7,62-P	N/A	N/A	N/A
08	MG108-7,62-P	N/A	N/A	N/A
09	MG109-7,62-P	N/A	N/A	N/A
10	MG110-7,62-P	N/A	N/A	N/A
11	MG111-7,62-P	N/A	N/A	N/A
12	MG112-7,62-P	N/A	N/A	N/A
13	MG113-7,62-P	N/A	N/A	N/A
14	MG114-7,62-P	N/A	N/A	N/A
15	MG115-7,62-P	N/A	N/A	N/A
16	MG116-7,62-P	N/A	N/A	N/A
17	MG117-7,62-P	N/A	N/A	N/A
18	MG118-7,62-P	N/A	N/A	N/A
19	MG119-7,62-P	N/A	N/A	N/A
20	MG120-7,62-P	N/A	N/A	N/A
21	MG121-7,62-P	N/A	N/A	N/A
22	MG122-7,62-P	N/A	N/A	N/A
23	MG123-7,62-P	N/A	N/A	N/A
24	MG124-7,62-P	N/A	N/A	N/A